



KITCHEN FIRE SUPPRESSION SYSTEM

UL EX4658

BULLETIN NO.

SL-205

Date: July 2023

To: Authorized Amerex Distributors and OEMs

From: Sales and Product Management—Kitchen Systems

Re: KP protection for Garland ME/G-1P, ME/G-2P, ME/G-3PX, XPE/G12, XPE/G24, XPE/G36 & Taylor C850, C852, C858, L852, L858

Note: This technical bulletin serves as an addition to the KP/ZD Design, Installation, Maintenance, & Recharge Manual P/N 20150 Amerex Restaurant Fire Suppression System dated February 14th, 2019. This technical bulletin is not meant to replace any requirements and/or limitations within, and the information in the bulletin will be added at the next revision. This bulletin defines a UL LISTED COVERAGE for the protection of the listed appliance(s).

Amerex is announcing the addition of an appliance-specific KP fire protection coverage for the Garland ME/G-1P, ME/G-2P, ME/G-3PX, XPE/G12, XPE/G24, XPE/G36, & Taylor C850, C852, C858, L852, L858. This coverage must be installed in accordance with all requirements of NFPA 17A and NFPA 96.

This protection can function as a modular application for the aforementioned models. If there are several units installed side by side, a single nozzle is sufficient between the two units, while preserving the nozzle spacing for each appliance.

This coverage utilizes QTY (2 - 4) 11982 nozzles. The nozzles are to be installed above the grill with a 13 in (330 mm) spacing between each, aiming between the upper platens and at the centerline of the cooking surface front to back.

Nozzle Type: 11982

Nozzle Quantity: Single platen (ME/G-1P, XPE/G12, C850) — 2 nozzles
Double platen (ME/G-2P, XPE/G24, C852, L852) — 3 nozzles
Triple platen (ME/G-3PX, XPE/G36, C858, L858) — 4 nozzles

Nozzle Height: 14 in to 28 in (356 mm to 711 mm)

Nozzle Locations: The right-most nozzle—0 in $\pm$ 1 in (0 mm $\pm$ 25 mm) from the right edge of the cooking surface; 13 in (330 mm) spacing between each nozzle; 0 in to 14 in (0 mm to 356 mm) off the back edge of the cooking surface; one on each side of the platens

Nozzle Aim Points: Between the platens and at the centerline of the cooking surface from the front to back




KITCHEN FIRE SUPPRESSION SYSTEM

UL EX4658

BULLETIN NO.

SL-205

Garland ME/G-1P, ME/G-2P, ME/G-3PX, XPE/G12, XPE/G24, XPE/G36

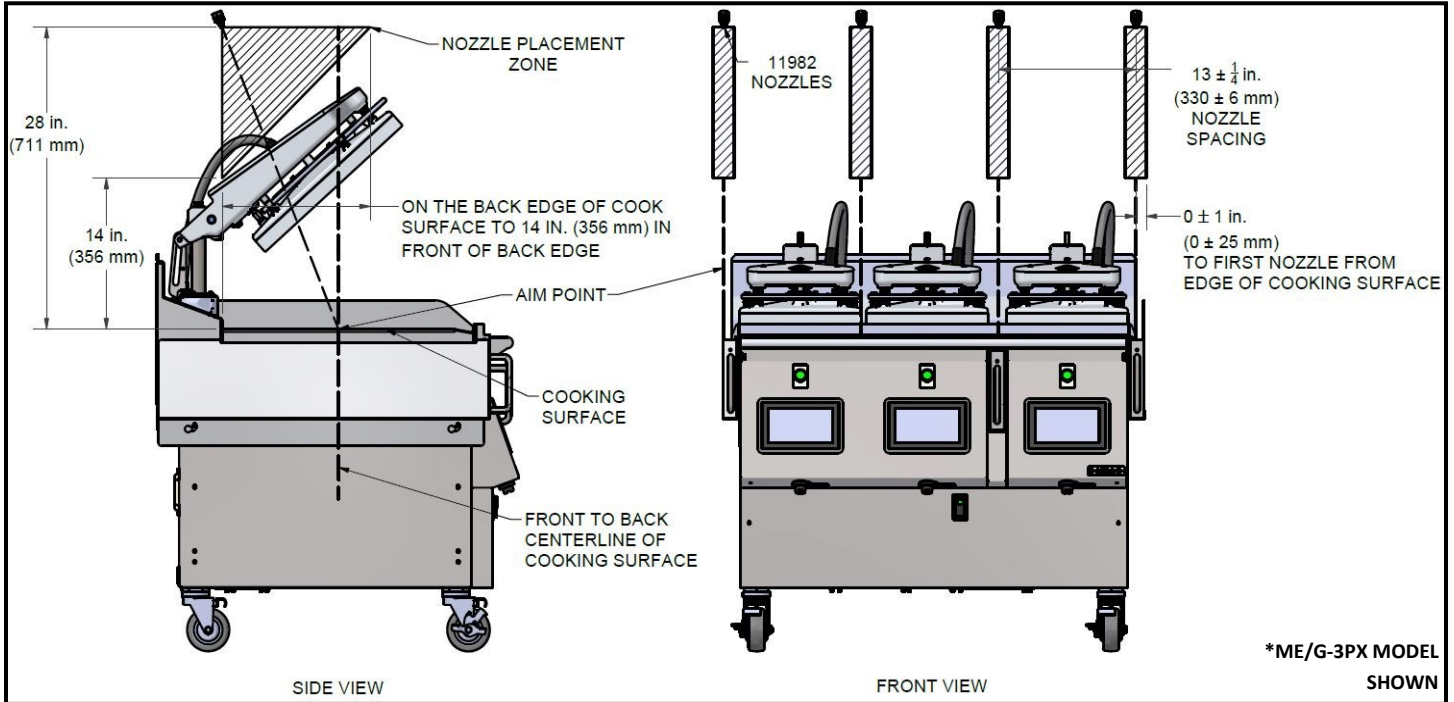

Specifications:

Cooking Surface Size: ME/G-1P: 11.75 in. x 22 in. (298 mm x 559 mm)
ME/G-2P: 23.75 in. x 22 in. (603 mm x 559 mm)
ME/G-3PX: 23.75 in. x 22 in. (603 mm x 559 mm) &
11.75 in. x 22 in. (298 mm x 559 mm)

XPE/G12: 11.75 in. x 22 in. (298 mm x 559 mm)
XPE/G24: 23.75 in. x 22 in. (603 mm x 559 mm)
XPE/G36: 35.75 in. x 22 in. (908 mm x 559 mm)

Upper Platen Size: ME/G Series: 11.5 in. x 17.5 in. (292 mm x 445 mm) each
XPE/G Series: 11.5 in. x 20 in. (292 mm x 508 mm) each

Input Rating:

ME-1P: 7.8 kW	MG-1P: 24,000 BTU and 3.5 kW
ME-2P: 15.6 kW	MG-2P: 48,000 BTU and 6.9 kW
ME-3PX: 23.4 kW	MG-3PX: 72,000 BTU and 10.4 kW
XPE12: 8.1 kW	XPG12: 20,000 BTU and 3.5 kW
XPE24: 16.2 kW	XPG24: 40,000 BTU and 7.0 kW
XPE36: 24.3 kW	XPG36: 60,000 BTU and 10.6 kW




KITCHEN FIRE SUPPRESSION SYSTEM

UL EX4658

BULLETIN NO.

SL-205

Taylor C850, C852, C858, L852, L858

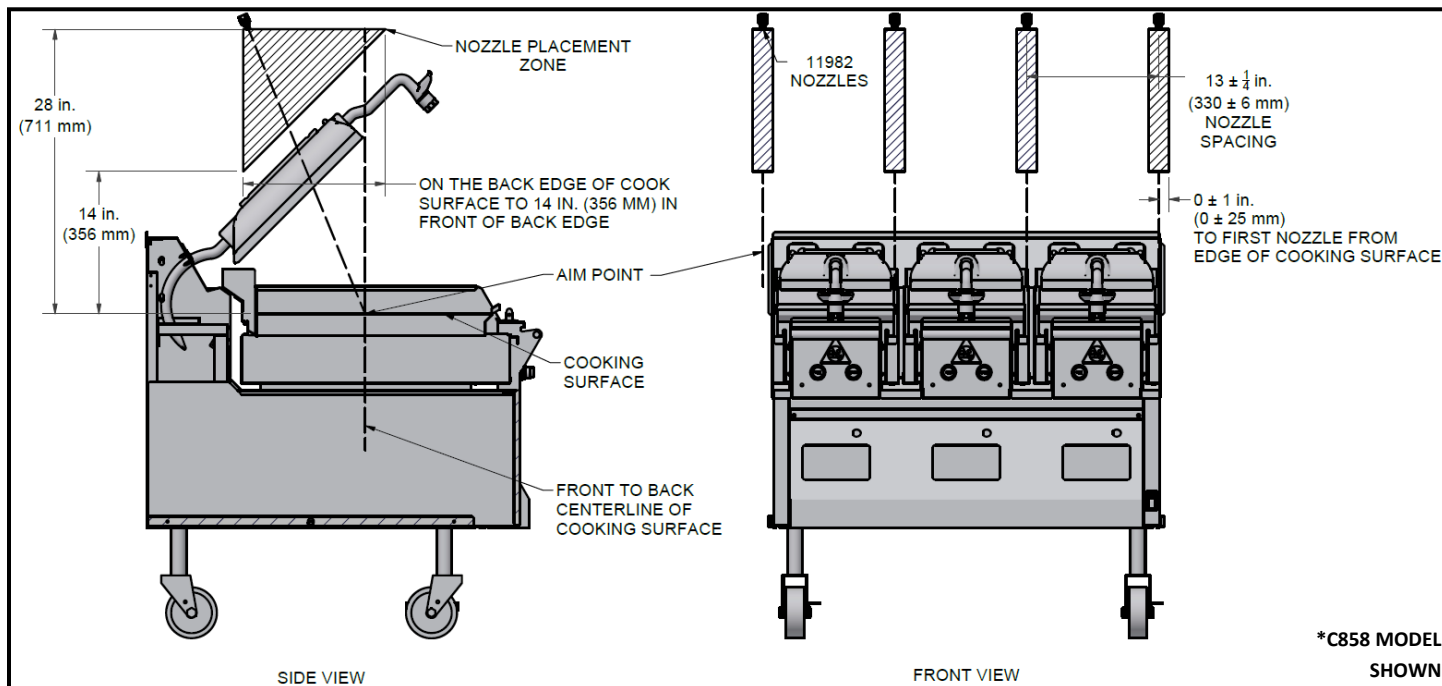

Specifications:

Cooking Surface Size: C850, C852, C858: 10 5/8 in. x 24 in. (270 mm x 610 mm) each
L852, L858: 10 5/8 in. x 24 in. (270 mm x 610 mm) each

Upper Platen Size: C850, C852, C858: 11 in. x 17.6 in. (279 mm x 447 mm) each
L852, L858: 11 in. x 21.6 in. (279 mm x 549 mm) each

Input Rating:

C850: 8 kW	
C852: 15 kW	L852: 16.8 kW
C858: 22 kW	L858: 25.2 kW